

# DOORLEC DIGITAL RECEIVER MOUNTING INSTRUCTIONS FOR GARAGE DOOR OPERATOR INSTALLATIONS

## WARNING

Before installing the Doorlec Receiver, read these instructions carefully. If the receiver is improperly connected to the operator terminals, the operator will not function and the system may be damaged.

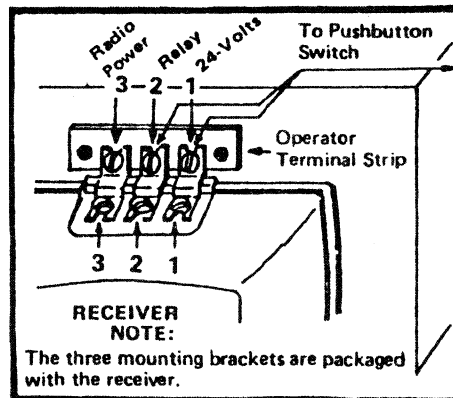


Figure 1. For three-terminal operators: Receiver is shown electro-mechanically attached to operator with terminal mounting brackets.

## CAUTION

When the Doorlec receiver is used to control operators having 3-screw terminal strips, the receiver should be mounted pointing down (See Figure 1. above) and the antenna should be clear. Otherwise use the Receiver Mounting Clip as shown on the the reverse of this instruction sheet.

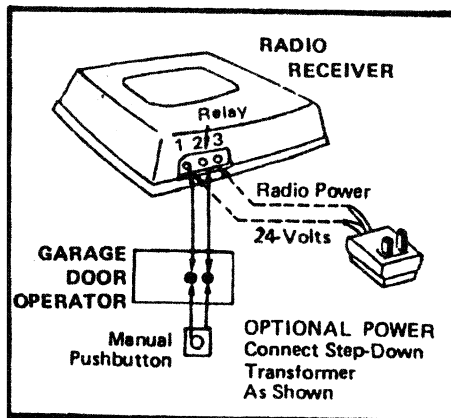


Figure 2. Two-terminal operator: Receiver powered by a step-down transformer.

## HIGH-DENSITY INSTALLATIONS

Where a number of receivers are to be installed in close proximity (as in an apartment complex), install such receivers at least 10-feet apart. If receivers are installed closer than 10 feet apart, blocking may occur.

## POWER SEPARATE FROM OPERATOR

Where it is not feasible to obtain power from the operator, connect a Transformer (AC adapter) to the receiver as shown in Figure 2, Then plug transformer into a convenient (unswitched) 110 VAC outlet.

## NOTE:

See reverse side of this card for digital coding and mounting clip information.

**BATTERY INSTALLING**

Please find attached battery and removed the battery cover on the back side of transmitter. Then, snap the battery into it's connector.

**DIGITAL CODING**

Doorlec receivers and their associated transmitters are checked at the factory. You had better to change codes before installation.

**CODE SETTING**

Use a pencil or ball-point pen to set the ten keys on the transmitter and the receiver to the same ON/OFF positions. Following the 1-2-4-6-7-9-10 code example below, note that all code numbers shown represent switches set to the ON position. In the example below, the slides are moved as shown by the small rectangular symbols on the ON/OFF keys.

For example, if the selected code is:


1	2		4		6	7		9	10
---	---	--	---	--	---	---	--	---	----

The switch appears:

	1	2	3	4	5	6	7	8	9	10
ON	■	■		■		■	■		■	■
↑			■		■			■		

**RECEIVER MOUNTING CLIP**

A mounting clip is packaged with each receiver. To install the receiver, attach the clip to the mounting surface with screws. Position the two rectangular holes on the back of the receiver over the clip and snap the receiver down into place.

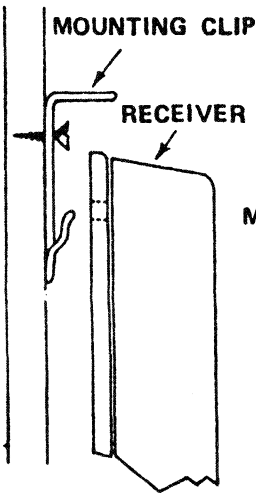

**MOUNTING HOLES ON RECEIVER**

