LiftMaster

Commercial Door Operators

INSTALLATION

- 1. Disconnect power.
- 2. Remove electrical box cover.
- 3. Connect coaxial cable to "ANT-EXT" on logic board.
- 4. Attach end of coaxial cable to BNC Connector on the inside of the electrical box.
- 5. Connect antenna to BNC Connector on the outside of the electrical box.
- 6. Cut the purple antenna wire from the logic board.
- 7. Replace cover.
- 8. Reconnect power.


Test the system.

MEDIUM DUTY LOGIC EXTERNAL ANTENNA KIT MODEL EXT-ANT

MARNING

This device is for use ONLY on LiftMaster Commercial Door Operators. Use on other than recommended equipment voids warranty, and may cause PROPERTY DAMAGE or SERIOUS PERSONAL INJURY. Read and follow ALL instructions.

Have door in full open or closed position and disconnect power to the garage door opener BEFORE installing the CDO Commercial Protector System®.

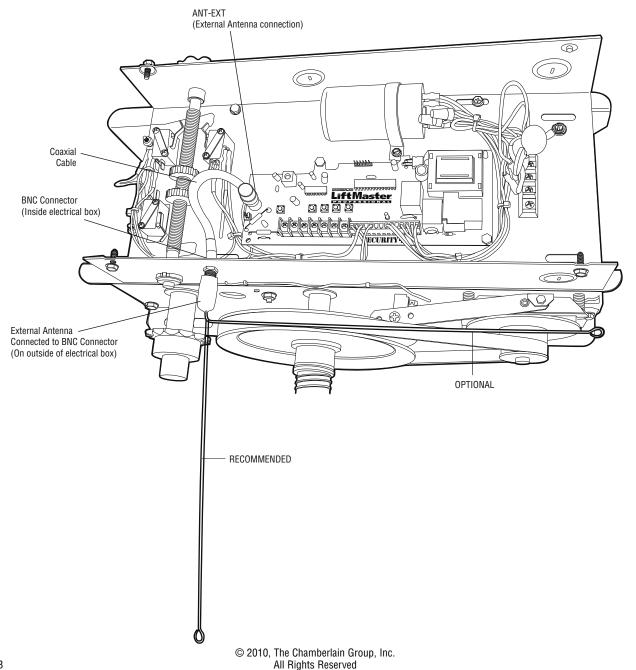

HOW TO ORDER REPAIR PARTS

DEK CANADA INC

1928 ST-REGIS BLVD. DORVAL, QC H9P 1H6

TEL: 514-685-5800 TOLL-FREE: 1-800-361-3198 FAX: 514-685-5804

www.dekcanada.com

WHEN ORDERING REPAIR PARTS
PLEASE SUPPLY THE FOLLOWING INFORMATION:

PART NUMBER DESCRIPTION MODEL NUMBER