


Preformed Vehicle Detection Loop Pave-Over Style (Flexible)

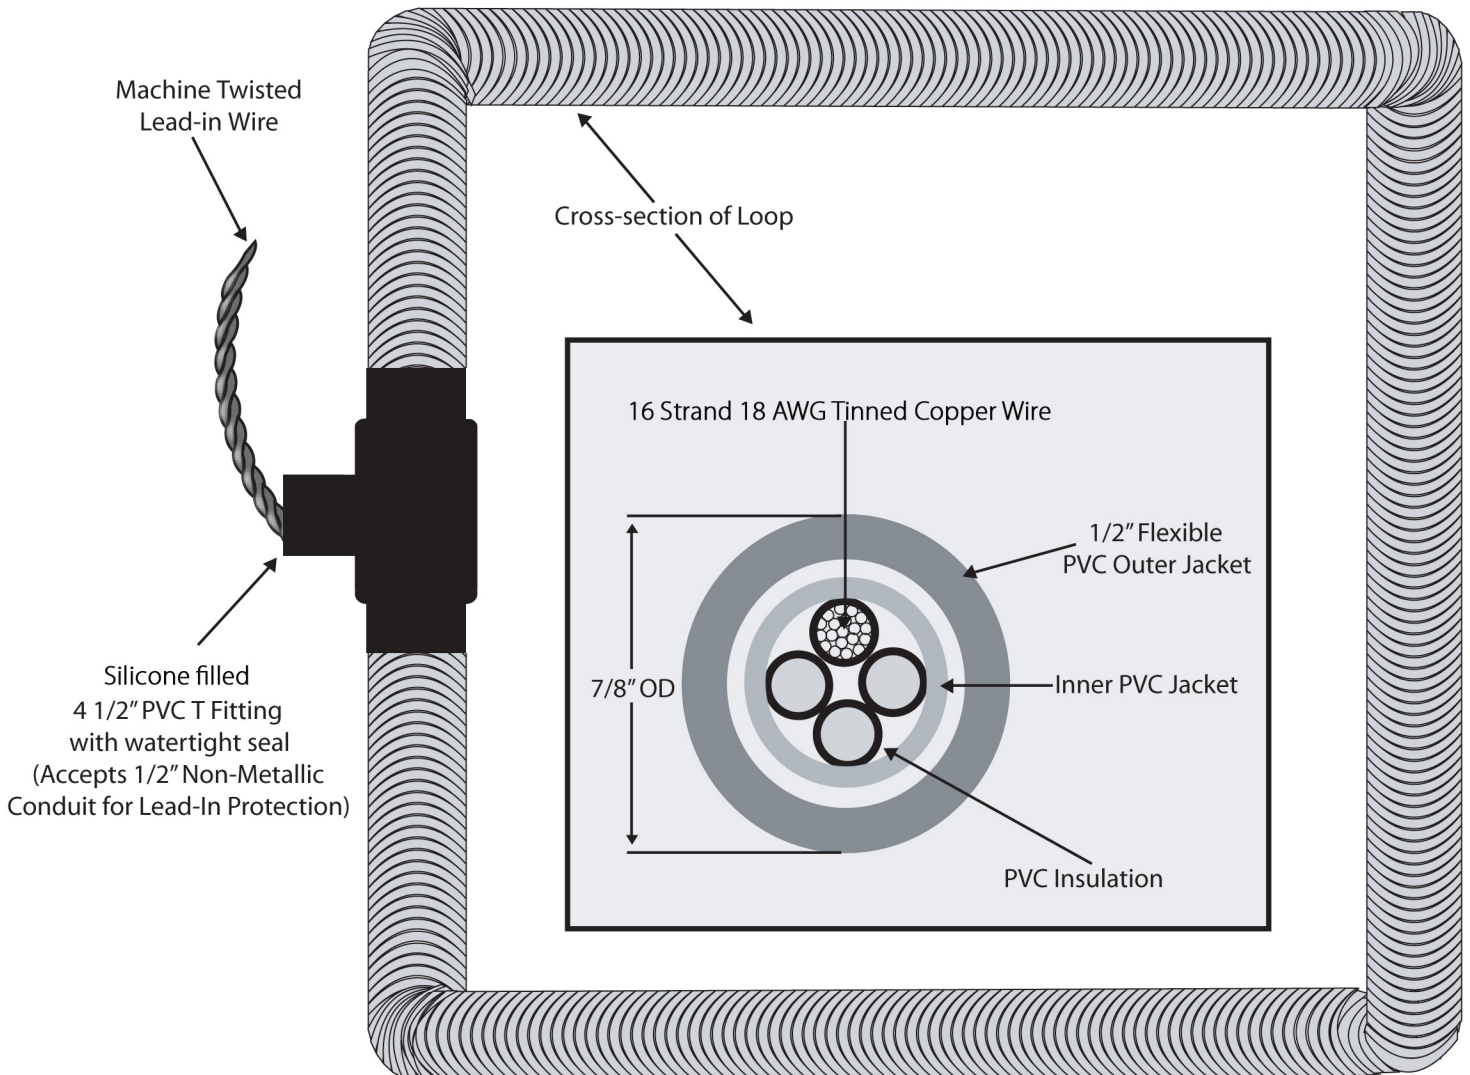

SPECIFICATIONS

Standard Loop Sizes

4' x 6'	6' x 10'
4' x 8'	6' x 15'
4' x 10'	6' x 20'
4' x 12'	6' x 24'
4' x 35'	
4' x 48'	

Custom loop sizes are available.

Standard Lead-in Length 50'

Custom lead-in lengths are available.

Loop Wire

18GA, 16 strand Tinned Copper with PVC Insulation and Outer Jacket.

Lead-in

18GA Twisted Pair, 16 Strand XLP Insulated.

Conduit

Flexible Non-Metallic 1/2" Liquid Tight Conduit.

"T"

4 1/2" PVC T Fitting with watertight seal.
Accepts 1/2" Non-Metallic Conduit
for Lead-in Protection.