



WARNING

TO AVOID SERIOUS PERSONAL INJURY OR DEATH FROM ELECTROCUTION, DISCONNECT ELECTRIC POWER TO RECEIVER BEFORE INSTALLING.

INSTALLATION INSTRUCTIONS

1. Open cover and remove plastic bags containing hardware (2 screws, 3 screws and 4 rubber washers).
2. Remove backplate from STAR250 and secure to inside of enclosure using the (2) screws removed from inside of enclosure (see figure 1).
3. Connect antenna supplied with STAR250 unit to the enclosure (see figure 1).
4. Secure enclosure to wall using rubber washers removed from inside of enclosure and hardware based on mounting application, not supplied (see figure 2).
5. Connect coaxial cable to STAR250 receiver (see figure 1).
6. Wire and program STAR250 unit using instructions shipped with STAR250 (01-18513).
7. Snap STAR250 unit to back plate.
8. To finish installation, close box and secure in place with 3 enclosure screws and/or lock (not provided).

The 71-65WTBOX is compatible with standard 1-1/8" Master brand locks.

FIGURE 1


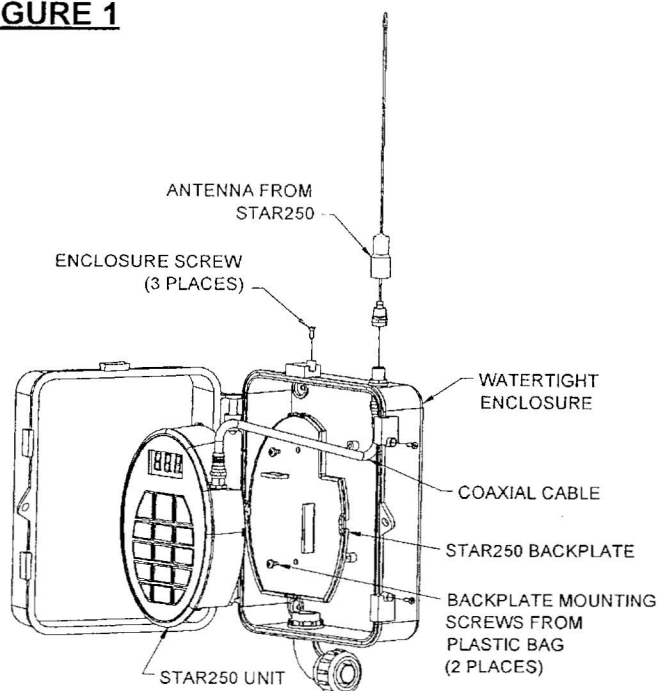


FIGURE 2

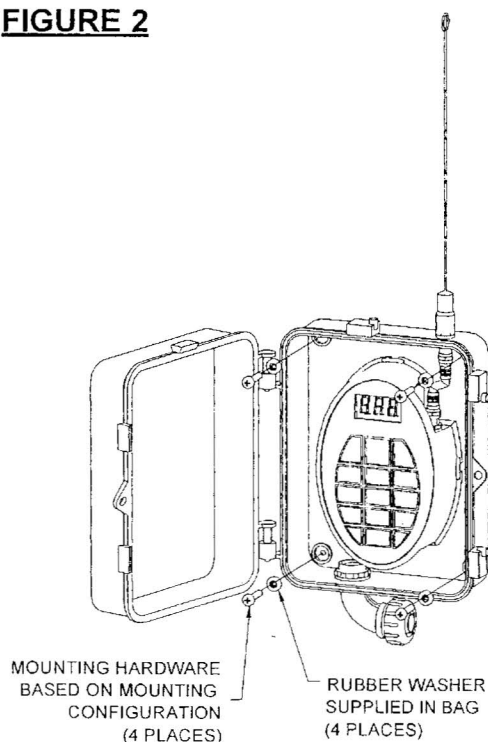

HOW TO ORDER REPAIR PARTS

DEK CANADA INC

1928 ST-REGIS BLVD.

DORVAL, QC

H9P 1H6

TEL: 514-685-5800

TOLL-FREE: 1-800-361-3198

FAX: 514-685-5804

www.dekcanada.com

**WHEN ORDERING REPAIR PARTS
PLEASE SUPPLY THE FOLLOWING INFORMATION:**

PART NUMBER	DESCRIPTION	MODEL NUMBER
--------------------	--------------------	---------------------